


E MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

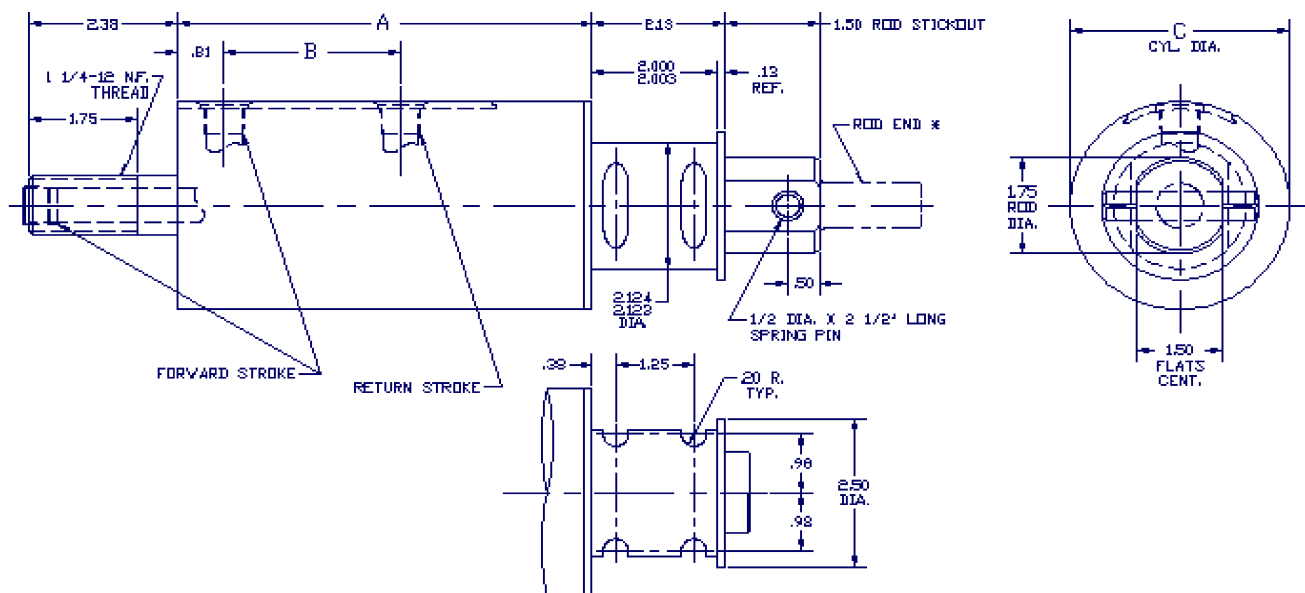

DUAL PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C		EXT.	RET.	
AC-EA-G-3030-4*-42	1.00	7.38	3.25	5.00		30.58 SQ. IN.	14.68 SQ. IN.	
AC-EA-G-3030-6*-42	1.50	8.38	3.75					
AC-EA-G-3030-8*-42	2.00	9.38	4.25					
AC-EA-G-3030-12*-42	3.00	11.38	5.25					
AC-EA-G-3030-16*-42	4.00	13.38	6.25					
AC-EA-G-3030-20*-42	5.00	15.38	7.25					
AC-EA-G-3030-24*-42	6.00	17.38	8.25					
AC-EA-G-3770-4*-42	1.00	7.38	3.25	5.50		38.04 SQ. IN.	18.41 SQ. IN.	
AC-EA-G-3770-6*-42	1.50	8.38	3.75					
AC-EA-G-3770-8*-42	2.00	9.38	4.25					
AC-EA-G-3770-12*-42	3.00	11.38	5.25					
AC-EA-G-3770-16*-42	4.00	13.38	6.25					
AC-EA-G-3770-20*-42	5.00	15.38	7.25					
AC-EA-G-3770-24*-42	6.00	17.38	8.25					
AC-EA-G-4600-4*-42	1.00	7.38	3.25	6.00		46.29 SQ. IN.	22.53 SQ. IN.	
AC-EA-G-4600-6*-42	1.50	8.38	3.75					
AC-EA-G-4600-8*-42	2.00	9.38	4.25					
AC-EA-G-4600-12*-42	3.00	11.38	5.25					
AC-EA-G-4600-16*-42	4.00	13.38	6.25					
AC-EA-G-4600-20*-42	5.00	15.38	7.25					
AC-EA-G-4600-24*-42	6.00	17.38	8.25					
AC-EA-G-5500-4*-42	1.00	7.38	3.25	6.50		55.32 SQ. IN.	27.05 SQ. IN.	
AC-EA-G-5500-6*-42	1.50	8.38	3.75					
AC-EA-G-5500-8*-42	2.00	9.38	4.25					
AC-EA-G-5500-12*-42	3.00	11.38	5.25					
AC-EA-G-5500-16*-42	4.00	13.38	6.25					
AC-EA-G-5500-20*-42	5.00	15.38	7.25					
AC-EA-G-5500-24*-42	6.00	17.38	8.25					

TRIPLE PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C		EXT.	RET.	
AC-EA-E3-4450-4*-42	1.00	10.12	3.25	5.00		44.86 SQ. IN.	14.68 SQ. IN.	
AC-EA-E3-4450-6*-42	1.50	11.62	3.75					
AC-EA-E3-4450-8*-42	2.00	13.12	4.25					
AC-EA-E3-4450-12*-42	3.00	16.12	5.25					
AC-EA-E3-4450-16*-42	4.00	19.12	6.25					
AC-EA-E3-4450-20*-42	5.00	22.12	7.25					
AC-EA-E3-4450-24*-42	6.00	25.12	8.25					
AC-EA-E3-5550-4*-42	1.00	10.12	3.25	5.50		56.05 SQ. IN.	18.41 SQ. IN.	
AC-EA-E3-5550-6*-42	1.50	11.62	3.75					
AC-EA-E3-5550-8*-42	2.00	13.12	4.25					
AC-EA-E3-5550-12*-42	3.00	16.12	5.25					
AC-EA-E3-5550-16*-42	4.00	19.12	6.25					
AC-EA-E3-5550-20*-42	5.00	22.12	7.25					
AC-EA-E3-5550-24*-42	6.00	25.12	8.25					
AC-EA-E3-6800-4*-42	1.00	10.12	3.25	6.00		68.42 SQ. IN.	22.53 SQ. IN.	
AC-EA-E3-6800-6*-42	1.50	11.62	3.75					
AC-EA-E3-6800-8*-42	2.00	13.12	4.25					
AC-EA-E3-6800-12*-42	3.00	16.12	5.25					
AC-EA-E3-6800-16*-42	4.00	19.12	6.25					
AC-EA-E3-6800-20*-42	5.00	22.12	7.25					
AC-EA-E3-6800-24*-42	6.00	25.12	8.25					
AC-EA-E3-8150-4*-42	1.00	10.12	3.25	6.50		81.97 SQ. IN.	27.05 SQ. IN.	
AC-EA-E3-8150-6*-42	1.50	11.62	3.75					
AC-EA-E3-8150-8*-42	2.00	13.12	4.25					
AC-EA-E3-8150-12*-42	3.00	16.12	5.25					
AC-EA-E3-8150-16*-42	4.00	19.12	6.25					
AC-EA-E3-8150-20*-42	5.00	22.12	7.25					
AC-EA-E3-8150-24*-42	6.00	25.12	8.25					

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 7