


Phone: 888-654-9353 Fax:

Fax: 937-253-2324

Email: sales@productionengineering.com

1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS



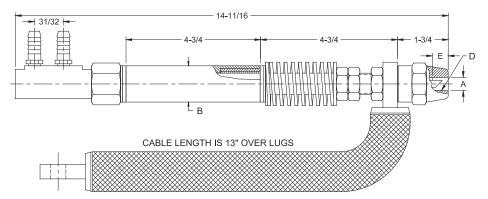

Like other low-inertia holders the heavy duty Adjust-A-Pressure Holders are used for multiple spot and projection welding, and are excellent for indirect welding when mounted in the Adjust-A-Angle Adapter.


Electrical current is conducted through heavy flexible cables and holder is installed to prevent any damaging effects to the spring mechanism. Light duty springs supplied to order.

ſ	Part No.	Major	Barrel	Taper Standard Electrode		Pressure
١	Holder	Taper Dia.	Dia.		Taper Engagement	Range (Pounds)
L	Assy.*	A	В	D	E	
Γ	18-1101	.463	1-1/4	4 RW	1/2	to 500
١	18-1102	.625		5 RW	3/4	
Γ	18-1103	.463	1-1/2	4 RW	1/2	
١	18-1104	.625		5 RW	3/4	

^{*} Standard holder uses 18-110006-1 spring. A heavy duty holder is available with spring 18-110006-2 for pressure to 1000 lbs.


For additional holder information and replacement parts see page 59.

1150 SERIES ADJUST-A-ANGLE ADAPTERS



1100 SERIES HOLDERS ASSEMBLED IN 1150 SERIES ADAPTER

1150 SERIES ADJUST-A-ANGLE ADAPT -ERS ARE ADAPTABLE FOR USE WITH SPRING TYPE LOW INERTIA HOLDERS 1100 SERIES AS WELL AS STRAIGHT HOLDERS 100, 200, AND 300 SERIES.




Adapter	Shank Dia.	
Assembly	_	
Part No.*	B _S	
18-1154	1 1	
18-1155	1-1/4	
18-1156	1-1/2	

* Adapters for all barrel sizes are available as specials



Phone: 888-654-9353 Fax: 937-253-2324 Email: sales@productionengineering.com

1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS

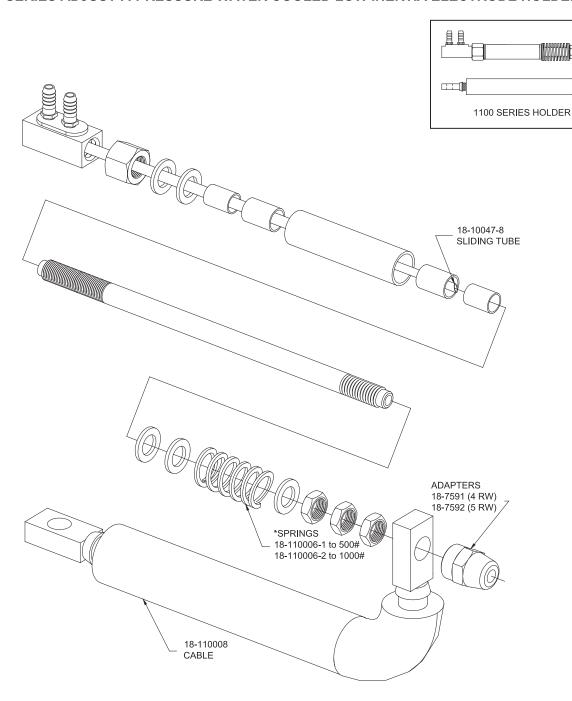

* SPRINGS: 500# SPRING IS PAINTED BLUE; 1000# SPRING IS PAINTED YELLOW

Part No. Holder Assy.*	Barrel	Adapter	Adjust -A- Angle Adapters
18-1101 18-1102	18-110005-1		Select from 1150 Series Chart page 58
18-1103 18-1104	18-110005-2	18-7591 18-7592	Special order

^{*} See page 58 for more information